


14AWG/4C Stranded Riser (CMR) Audio Cable

make connections
cmple[®]
.com

Cable Detail

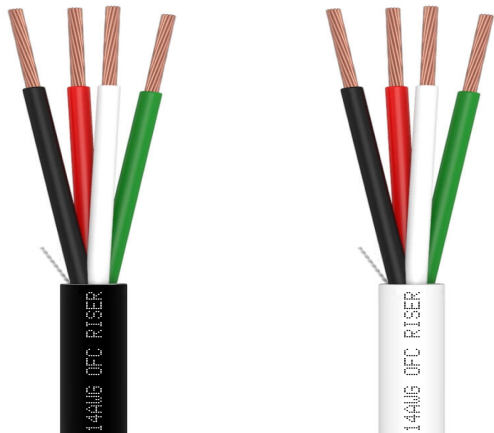

Approval



Description

- 14/4 Stranded CMR/CL3R Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 4 Oxygen Free Bare Copper Conductors in an Overall Jacket

Physical Characteristics

Conductor	Oxygen Free B.C.
Number of Conductor	4
AWG	14
Stranding	105
Diameter	0.0063 (inches)
Insulation Material	PVC
Diameter	0.1023 (inches)
Average Thickness	0.014 (inches)
Min. Point Thickness	0.013 (inches)
Assembly Diameter	0.248 (inches)
Jacket Material	PVC
Outer Diameter	0.3149 (inches)
Average Thickness	0.0315 (inches)
Min. Point Thickness	0.0283 (inches)
Rip Cord	Nylon
Conductor Resistance	9.2 (ohms)
Nominal Weight	42 (pounds)

Colors

- Insulation Color
Black / Red / White / Green
- Jacket Color
Black, White

Part Number

AC1404RBK4-500
AC1404RWH4-500

Package

500FT / REELEX II

Cable Marking

AUDIO CABLE 4 COND 14AWG HI-STRAND OFC
CMR/CL3R FT4 75C EXXXXXX C(ETL)US ***FT